LANDSCAPE LEGEND (This information is required to be permanently affixed to the plan.)
Zoning District: IN 1 - INDUSTRIAL BUSINESS DISTRICT **Net Lot Area:** 1.95 acres 84,794 square feet

OPEN SPACE	REQUIRED	PROVIDED
A. Square feet of open space required by Chapter 33, as indicated on site plan: Net lot area = 84,794 square feet x 15 % = 12,719 square feet	12,719 MIN.	25,456
B. Square feet of parking lot open space required by Chapter 18A, as indicated on site plan: The number of parking spaces 2 x 10 square feet per parking space =	20	20
C. Total square feet of landscaped open space required by Chapter 33 = (A+B)	12,739 (15%)	25,476 (30%)

LAWN AREA CALCULATION		
A. Total square feet of landscaped open space required by Chapter 33 =	12,739	
B. Maximum lawn area (St. Augustine sod) permitted = 20 % x 12,739 square feet =	2,548 max.	0,000

TREES		
A. The number of trees required per net lot acre	15	
less the existing number of trees that meet minimum requirements (minus)	-	
= 15 trees x net lot acreage = 29.25	30	30
B. 30% palm trees allowed (two palms = one tree) Palms provided =	0	0
C. Percentage of native trees required = the number of trees provided x 30% =	9	49
D. Street trees (max. average spacing of 35' o.c.): 264'-0" linear feet along street ÷ 35 =	8	11
Palms as street trees (max. average spacing 25' o.c.): 269'-1" linear feet along street ÷ 25 =	8	8
E. Street trees located directly beneath power lines (maximum average spacing of 25' o.c.): N/A linear feet along street ÷ 25 =	N/A	N/A
F. Total number of trees provided = (A+B+D)	46	49

SHRUBS		
A. The total number of trees required x 10 = the number of shrubs required	460	490
B. The number of shrubs required x 30% = the number of native shrubs required	138	490

IRRIGATION PLAN: Required by Chapter 33. Auto irrigation X or hose bib _____ provided.

BUFFER YARD REQUIREMENTS AS PER CHAPER 7 SECTION 6 (h):
NO BUFFER YARD REQUIRED BECAUSE ALL LAND USES ARE SAME (INDUSTRIAL LESS THAN .65 ISR)

TREE LIST

SYMBOL	PHOTOS OF TREES AND SHRUBS	PLANT NAME SCIENTIFIC	PLANT NAME COMMON	NATIVE SPECIES YES	NATIVE SPECIES NO	SIZE	CALIPER	QTY. TREE	QTY. STREET TREE
A QTY		CONOCARPUS ERECTUS	SILVER BUTTONWOOD	X		8'-0" MIN.	1-1/2" CAL MIN.	30	11
B QTY		EXISTING ROYSYONEA REGIA	EXISTING ROYAL PALM	X		12'-0" MIN.	3" CAL MIN.		8 (STREET TREES)

TOTAL STREET TREES	19
TOTAL TREES	30
TOTAL	49


SHRUB & ORNAMENTAL LIST

SYMBOL	PHOTOS OF TREES AND SHRUBS	PLANT NAME SCIENTIFIC	PLANT NAME COMMON	NATIVE SPECIES YES	NATIVE SPECIES NO	GALLON HEIGHT	CALIPER	QTY.
C QTY		CHRYSOBALANUS ICACO	COCOPLUM	X		36"	24" o.c.	490

GRASS AREAS


		PLANT NAME SCIENTIFIC	PLANT NAME COMMON	QTY.
SOD		STENOTAPHRUM SECUNDATUM	ST AUGUSTINE FLORATAM	–
BAHIA		PASPALUM NOTATUM	BAHIA SOD	–

* BAHIA GRASS DRAUGHT TOLERANT NOT PART OF LAWN AREA NO IRRIGATION PROVIDED

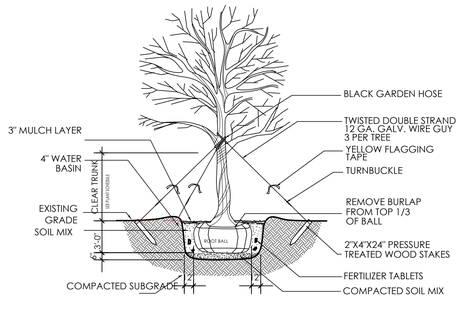


CANOPY TREE PLANTING DETAIL

N.T.S.

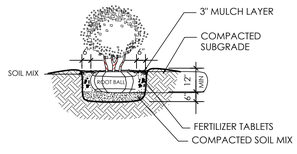

SHRUB PLANTING DETAIL

N.T.S.

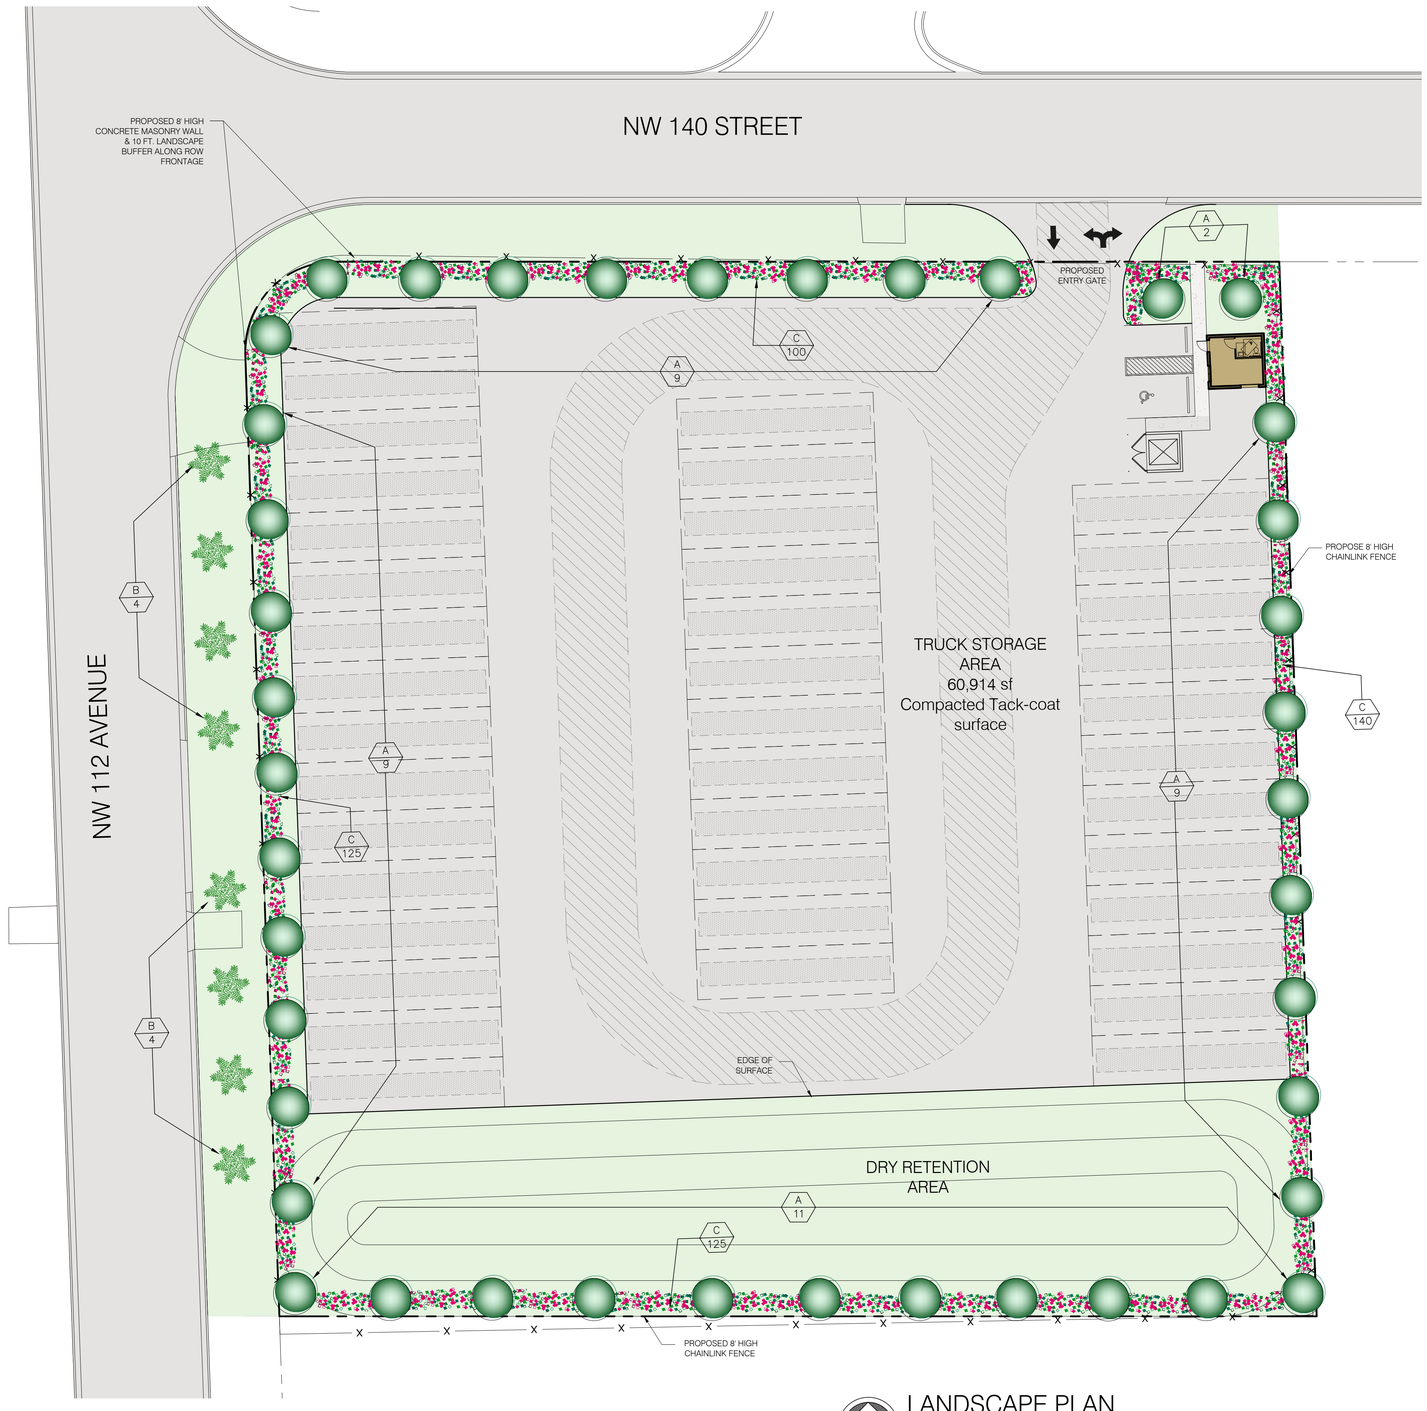

LANDSCAPE PLAN

SCALE: 1" = 20'-0"

REVISIONS:

AMC PARK I - TRUCK PARKING

CLIENT:

PROJECT LOCATION: 11150 NW 140 ST

CABRERA RAMOS Architects, Inc.

9851 NW 58 STREET. #107
DORAL, FLORIDA 33178
T:305.593.0750 F:305.593.8862
AA C001621

MIGUEL A. CABRERA JR., R.A.
State Reg. No. AR13118

ROSA E. RAMOS-BOTTA, R.A.
State Reg. No. AR15209

© 2023 CABRERA RAMOS ARCHITECTS, INC. The Design and Drawings for this Project are the property of the Architect and are protected under the Copyright Protection Act.

DATE: 8/21/2024
DRAWN: CRA
CHECKED BY: CRA
JOB NO.: 2828-23

SEAL

SHEET NO.

L100

LANDSCAPE PLAN